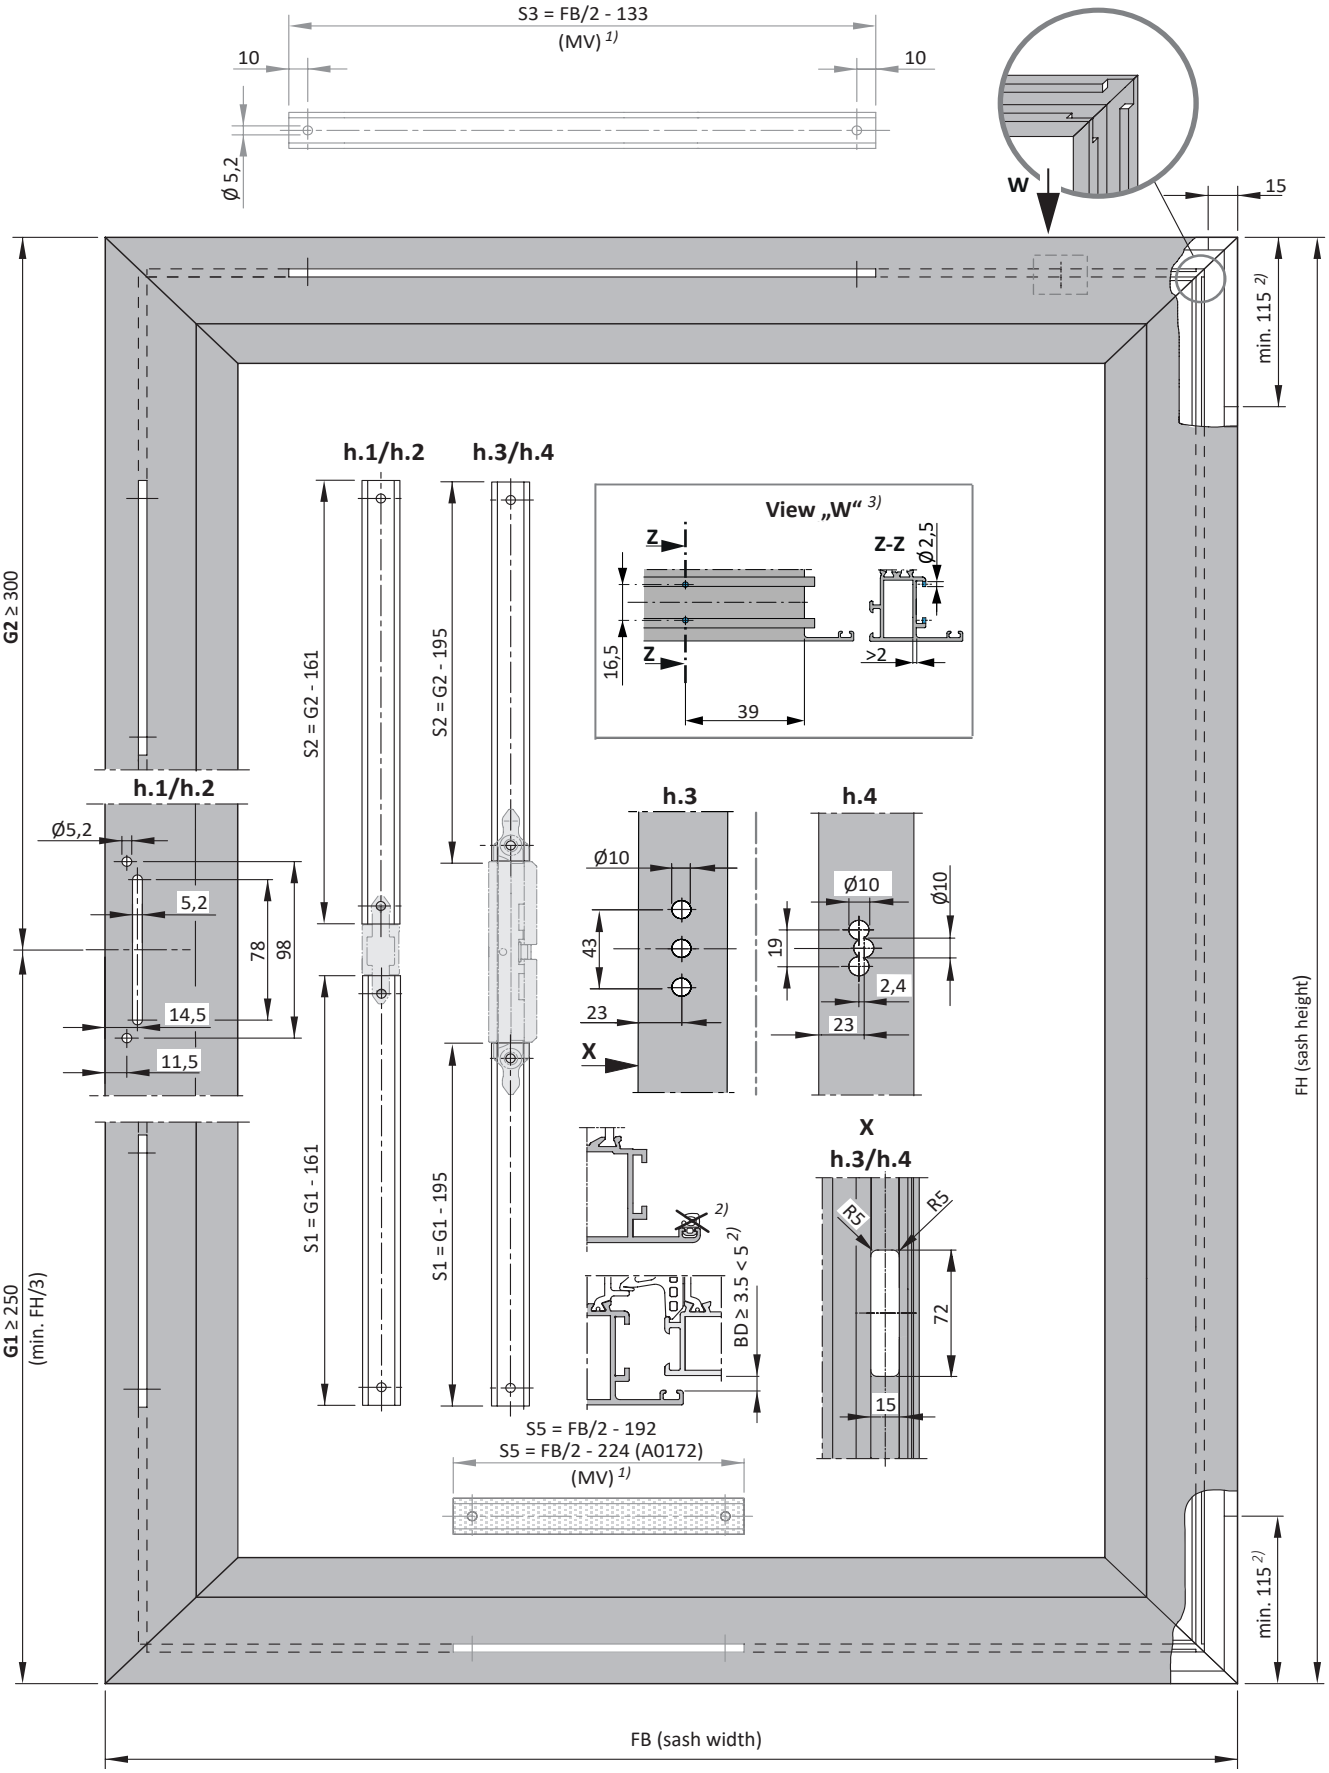



1) See page 3 and 4 for installation recommendation of centre locks and additional locks

2) Remove the rebate seal in the hinge gap area (minimum gap area 3.5 mm).

3) Only for profiling > 2 mm in groove base: predrill positioning punching screws stay ALU-D!

Frame dimensions

Single-sash square turn-only
hinge side ALU 5200 130 kg BD3.5

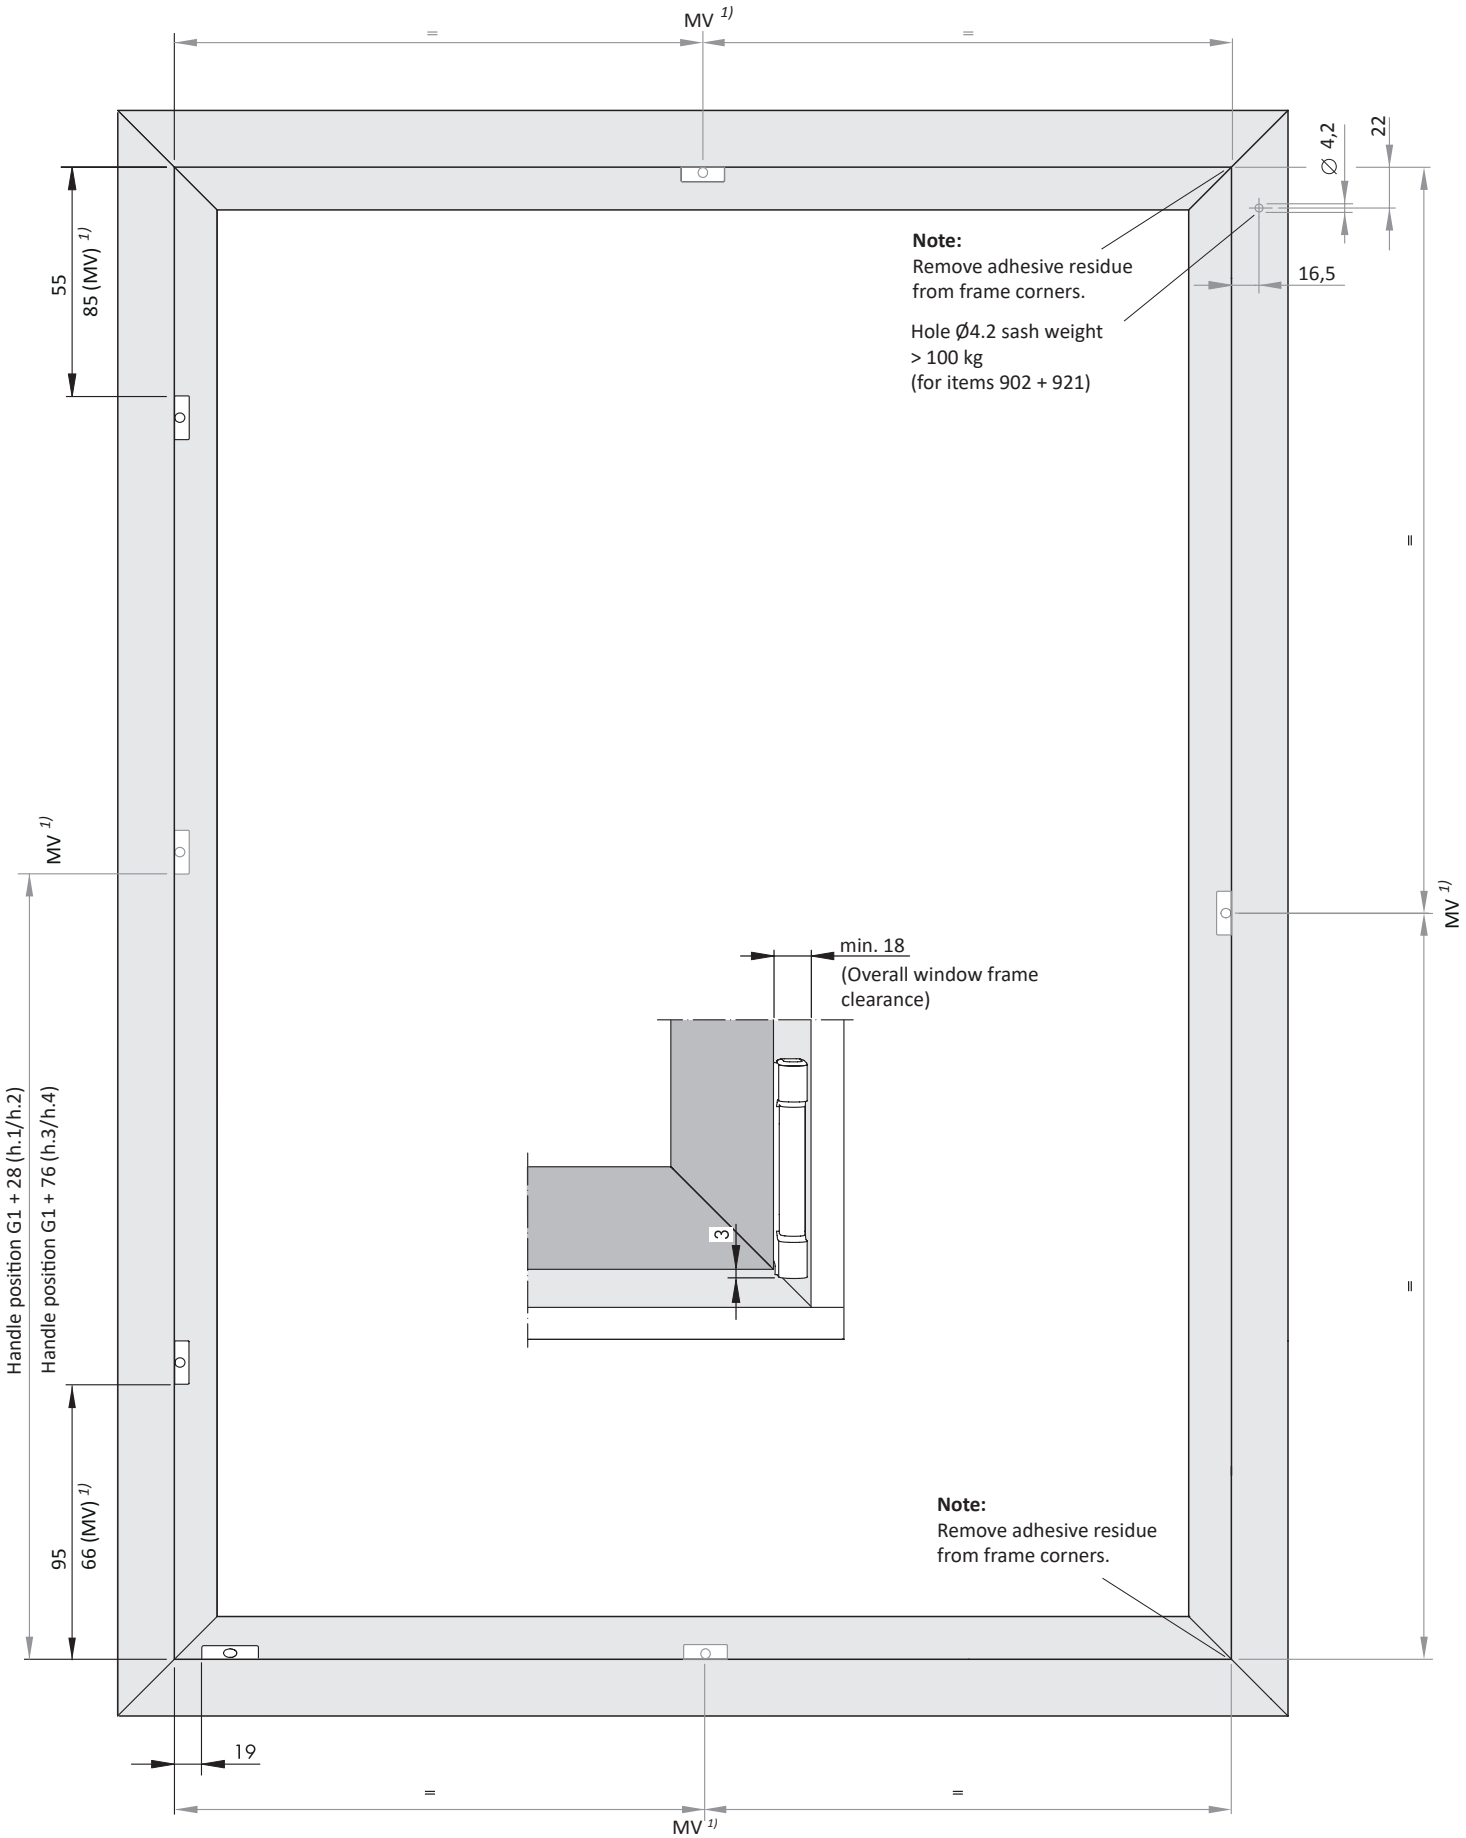

1) For installation of the centre locks and additional locks see page 3.