

建议窗扇槽口大于1000mm时,增加第二拉杆  
增加窗扇内倒稳定性

It is recommended that a second tie bar be added when the sash slot is larger than 1000mm.  
Increase the stability of inverted window sash.




前后密封调节±1mm  
左右搭接调节±3mm

±1mm Front and rear seal adjustment  
±3mm Left/right sliding adjustment

SS Zn

## KDL06

100 Tilt & Turn System Additional Pull Rod

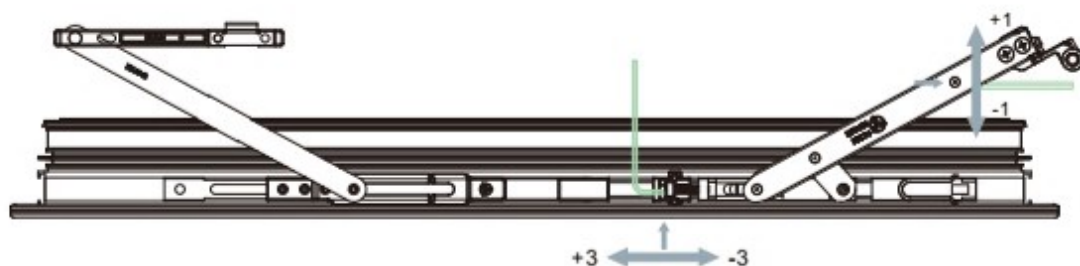

上合页型号 Upper hinge	最小扇槽口宽/mm Min. sash width/mm	最大扇槽口宽/mm Max. window width/mm	最小扇槽口高/mm Min. sash height/mm	最大扇槽口高/mm Max. window height/mm	内倒尺寸/mm Inverted dimension/mm
KDL04A	390	650	420	1800	130
KDL03A	460	1000	420	1800	160
KDL06	800	1300	420	1800	160